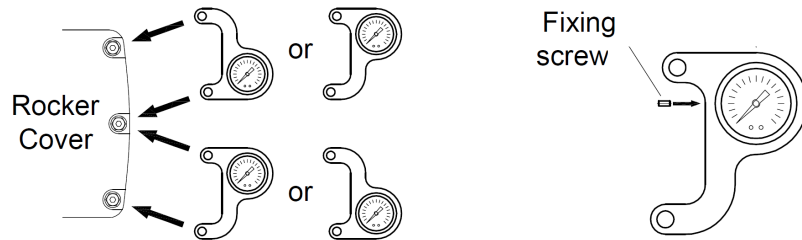

Harley-Davidson Rocker Box Mounted Air Ride Pressure Gauge Kit

Mounting instructions



1. Check all clearances before, during and after installation.
2. You can choose different positions for mounting the Pressure Gauge. The figure shows different options for putting the Pressure Gauge bracket on the rocker cover. Choose the one position that fits your motorcycle best, then fix the Gauge in right position inside the bracket using the screws and thread locker.



3. Unscrew the rocker cover screws and put the Pressure Gauge in a selected position. Put the rocker cover screws back through the holes in the Pressure Gauge bracket and screw those according to H-D factory service manuals.
4. Connect the air hose to the Air Pressure Gauge using the included L connector. Run the air pressure test. No air should be leaking in any connection. Make sure that air hose is protected from engine and exhaust system heat! Now the installation is complete. On the side of the gauge, there is a rubber plug. It is the pressure relief vent. Stub it through before use!
5. After the installation run a test drive to be sure everything is working perfectly.

NOTE:

- Installation of this kit requires detailed knowledge of the motorcycle model and mechanics. It is assumed that the installer has access to the proper tools and a working knowledge of them and factory service manuals.

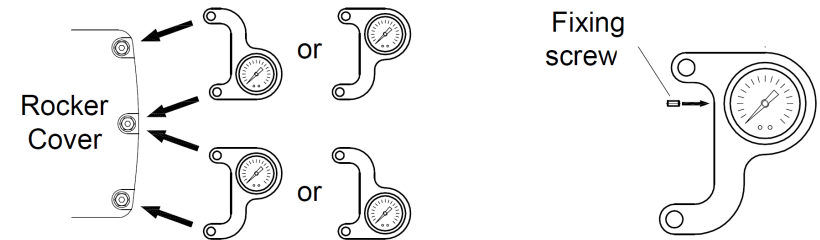
Killer Custom assumes no responsibility or liability for damage or injury of any kind arising out of the use or misuse of any products.

Harley-Davidson Rocker Box Mounted Air Ride Pressure Gauge Kit

Mounting instructions



1. Check all clearances before, during and after installation.
2. You can choose different positions for mounting the Pressure Gauge. The figure shows different options for putting the Pressure Gauge bracket on the rocker cover. Choose the one position that fits your motorcycle best, then fix the Gauge in right position inside the bracket using the screws and thread locker.



3. Unscrew the rocker cover screws and put the Pressure Gauge in a selected position. Put the rocker cover screws back through the holes in the Pressure Gauge bracket and screw those according to H-D factory service manuals.
4. Connect the air hose to the Air Pressure Gauge using the included L connector. Run the air pressure test. No air should be leaking in any connection. Make sure that air hose is protected from engine and exhaust system heat! Now the installation is complete. On the side of the gauge, there is a rubber plug. It is the pressure relief vent. Stub it through before use!
5. After the installation run a test drive to be sure everything is working perfectly.

NOTE:

- Installation of this kit requires detailed knowledge of the motorcycle model and mechanics. It is assumed that the installer has access to the proper tools and a working knowledge of them and factory service manuals.

Killer Custom assumes no responsibility or liability for damage or injury of any kind arising out of the use or misuse of any products.